


QUICKSTART

Leica DISTO™ D8

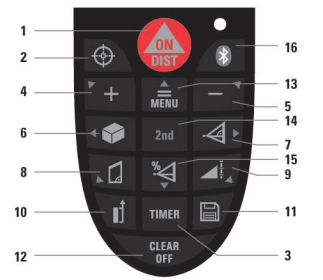

- Buttons**
- | | |
|-----------------------|---|
| 1 ON / DIST | 9 Functions |
| 2 (On/measuring) | 10 Reference |
| 3 Digital Pointfinder | 11 Storage / Memory |
| 4 Timer | 12 Clear / Off |
| 5 Plus (+) | 13 Menu / Equal |
| 6 Minus (-) | 14 2 nd for navigation |
| 7 Area / volume | 15 Ind. measurement
(inclination sensor) |
| 8 Trapezoid | 16 Bluetooth activate |

- when it has to be **right**



1x 2 sec. **C**
save constant

1x **C**
recall constant

2x **1** ... **30**
history (1-30)

CLEAR OFF + **2 sec.**
delete history

2x

$a \neq b$

$a = b$

3x 2 sec.

1x 2 sec.





$A = A1 + A2 + A3$

2x 2 sec.

2x 2 sec.

1x 2 sec.

1x 2 sec.

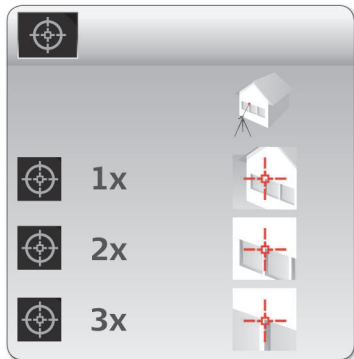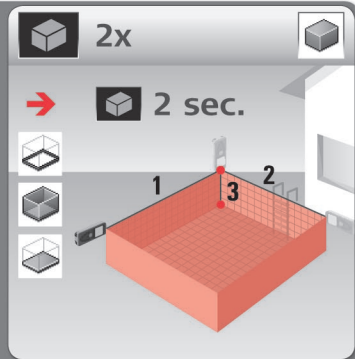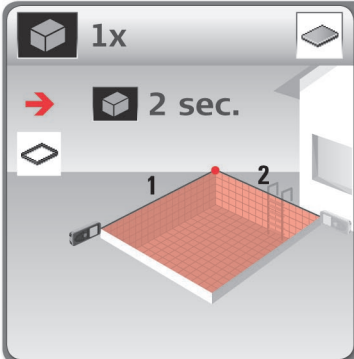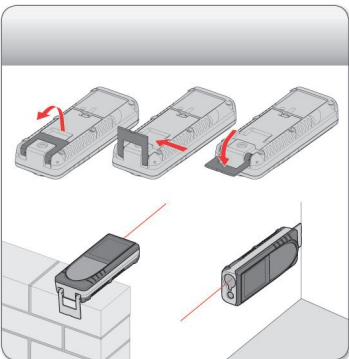

LASER RADIATION – DO NOT STARE INTO BEAM
 620-690nm/0.95mW max.
 CLASS II LASER PRODUCT

Laser class II
 in accordance with
 FDA 21CFR Ch.1 § 1040

Laser class 2
 in accordance with
 IEC 60825-1 and EN 60825-1

www.disto.com



SAP. No. 766553b

